




FY-2030

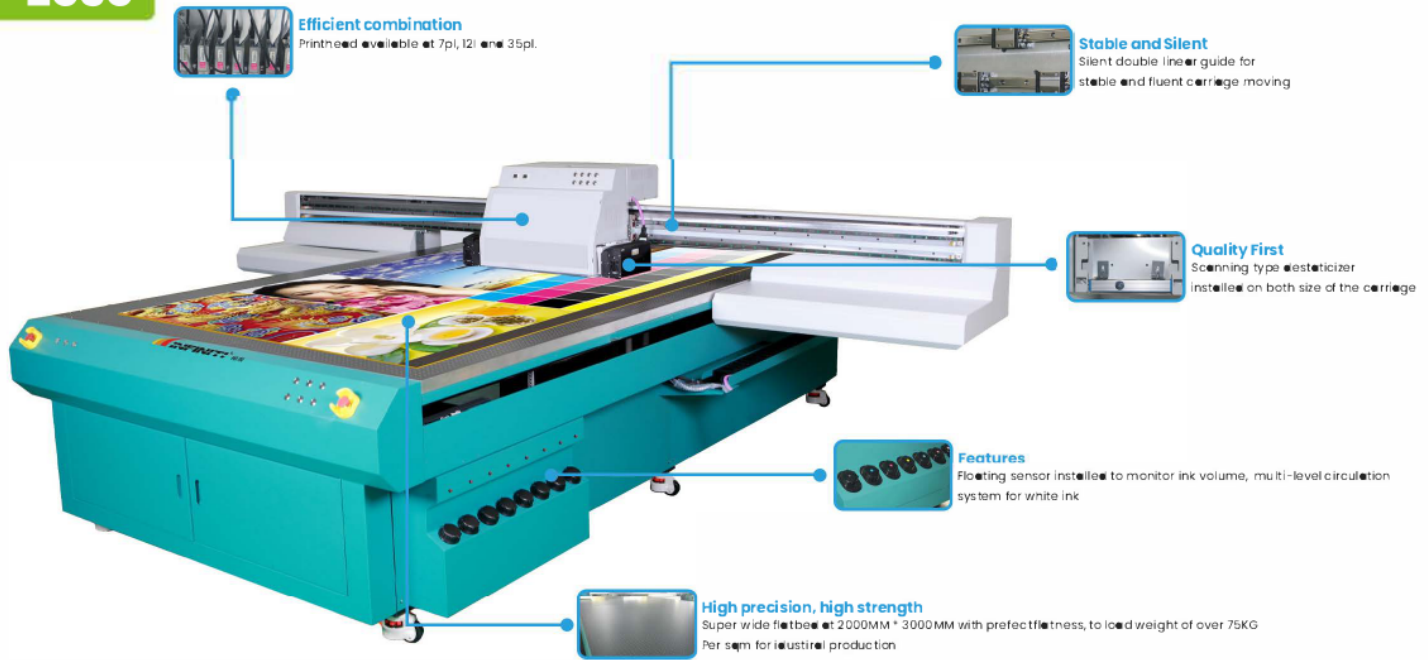

Technical Parameters:

Model	FY-2030A	FY-2030B	FY-2030G	
Print Head	SPT I020 - 35PL	SPT I020 - 12PL	SPT I024 GS	
Color Configuration	CMYKcLm + W / CMYK + W / 2CMYK + 2W / 2CMYKcm + 2W			
Max. Print Width	L 2000mm x W3000mm			
Print Speed* (14head)	Standard	51m ² /h	56m ² /h	77m ² /h
	Quality	36m ² /h	37m ² /h	53m ² /h
	High Quality	25m ² /h	27m ² /h	39m ² /h
Media	Weight	Max.75kg/m ²		
	Type	Wood, density board, glass metal sheet, Chevron board, PVC, Acrylic plate, Ceramic Tiles...		
	Thickness	Max. 100mm		
RIP Software	ONYX, Ultraprint			
Curing method	LED or Mercury Lamp			
Ink	UV Curable Ink			
Print interface	USB 2.0		USB 3.0	
Power Specification	Printer	AC220V 1000W (Extra 2,000W for mercury lamp)		
	Flatbed Vacuum Hold Down System	AC220V 3000W		
Operation Environment	Temperature	20°C - 28°C		
	Humidity	40% - 60%		
Dimension	L3965mm x W4250mm x H1460mm	1710kg		
Package Size Weight	Printer Frame : L4100mm x W2255mm x H1350mm Gantry : L4100mm x W760mm x H1020mm	2220kg		
Certificates	CE			

The Speed data are taken from the printer at fast speed. Product specifications are subject to change without notice in advance



Industrial Productivity



High Stability



Low Running Cost



6 Color Printing

- Super Large titanium alloy flatbed, expand your imagination for more application!
- Professional Inkjet Printing Equipment & Consumables Supplier